

1981
since



MIT
Made in Taiwan

研
磨
機
Spring
End
Grinding
Machine

機械式
Mechanical

立式磨床
Down Feed

H-405-4

<1.1°


測長功能 Length Detector	NO
上 / 下 砂輪升降顯示器 Grinding Wheel UP / Down Display	選購品 Optional
自動進料設備 Auto Feed-in Equipment	選購品 Optional
集塵機 Dust Collector	選購品 Optional
砂輪規格(公厘) Grinding Wheel Dimension(mm)	OD. Ø405 mm ID. Ø140 mm
砂輪數目 Grinding Wheel NO.	4

+ Features

- 彈簧全自轉(視彈簧長度設計)
Spring automatic rotating system (Designed by length of spring)
- 砂輪粒度平整校正器
Grinding wheel dressing system
- 一次研磨即可完成
Grinding accomplished in one beltline step
- 研磨摩托車避震彈簧
Grinding shock absorbing spring of motorcycle

自動Automatic
彈簧自轉系統
Spring Automatic Rotation System

標準Standard

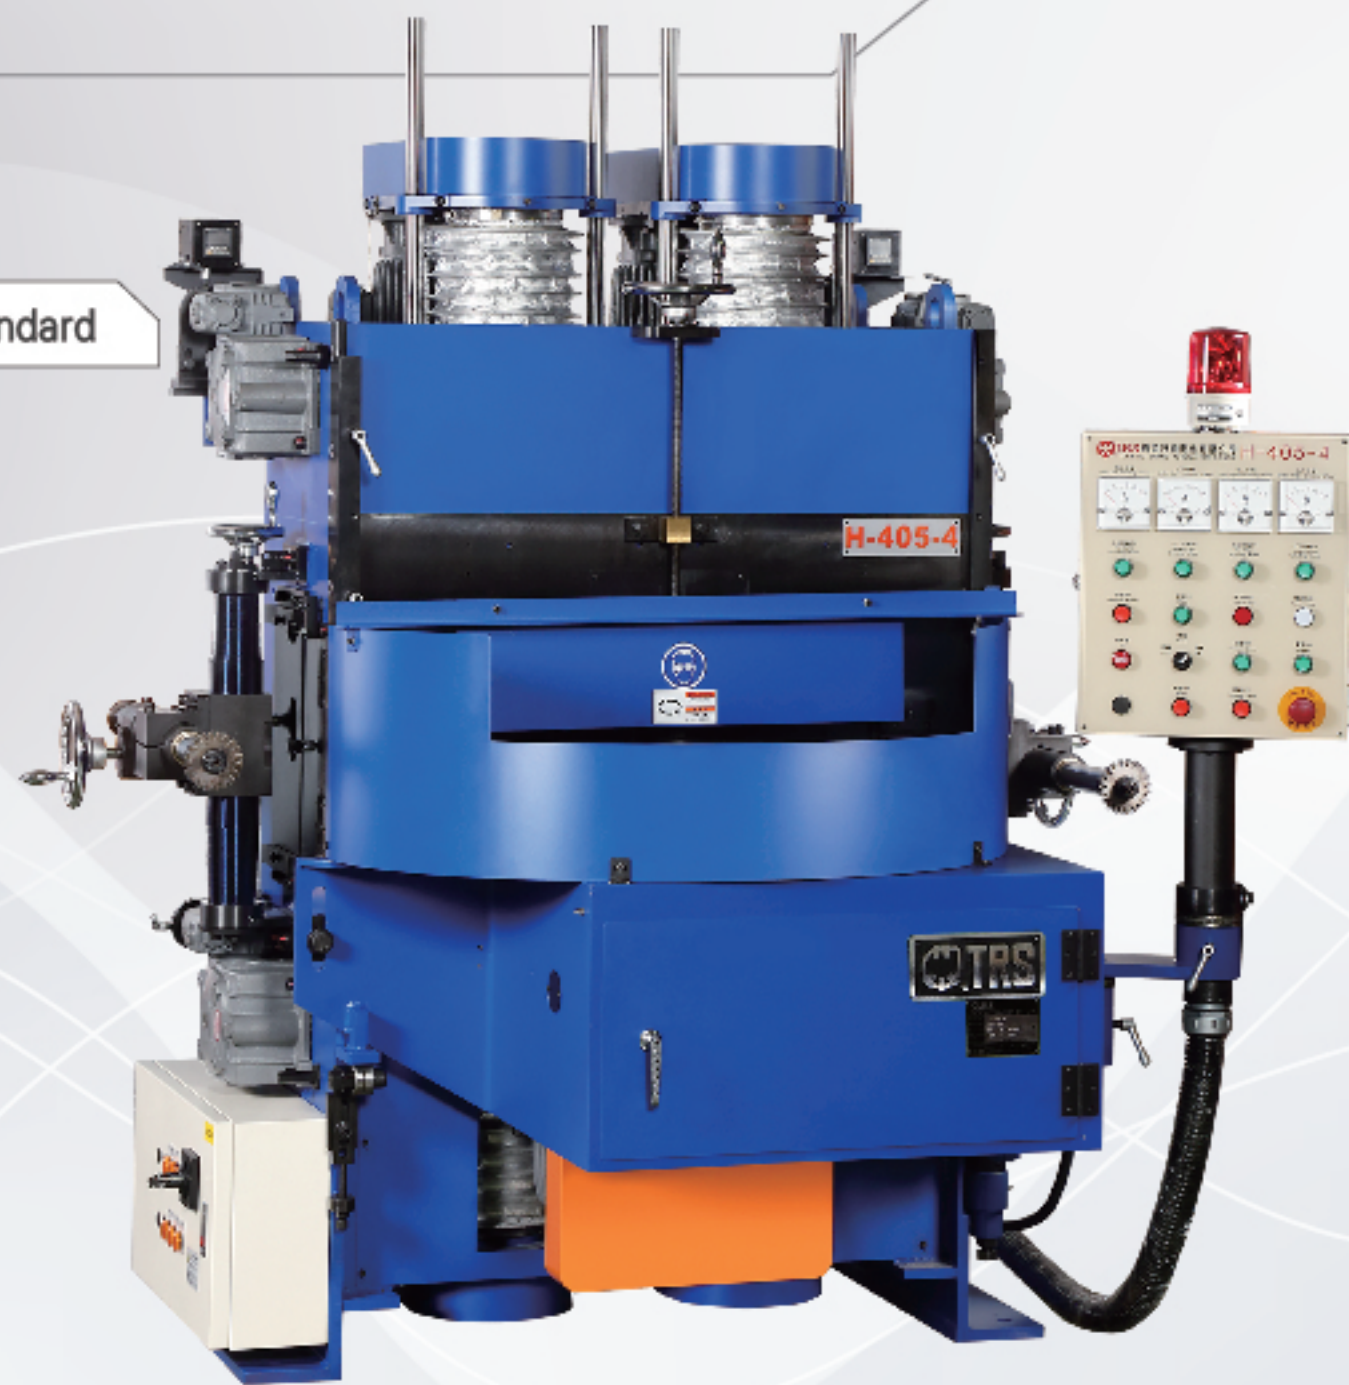

H-405-4



增高版Advance Equipment

線徑範圍(公釐) Wire Capacity(mm)	Ø 2.0 ~ Ø 7.0 mm	機臺本體尺寸(公釐) Machine Body Dimension(mm) <small>不含電子箱與電控箱 Electronic Control Box And Screen Excluded</small>	長 Length	2000 mm
彈簧最大外徑(公釐) Max. Spring O.D.(mm)	Ø 80 mm		深 Depth	1600 mm
彈簧長度範圍(公釐) Spring Length(mm)	20 ~ 350 mm 300 ~ 600 mm (Advance)		高 Height	2100 mm 2350 mm (Advance)
生產速度(條/分) Production Speed(pcs/min)	4 ~ 15 pcs/min	機臺安全操作 佔地面積(公釐) Safety Operation Location Area(mm)	長 Length	7000 mm
轉盤轉速(每分鐘轉速) Plate Rate(rpm)	1/4 ~ 1 1/2 rpm		深 Depth	5600 mm
砂輪轉速(每分鐘轉速) Grinding Wheel Rate(rpm)	1150	機臺重量(公斤) Machine Weight(kgs)	2450 mm 2650 mm (Advance)	